

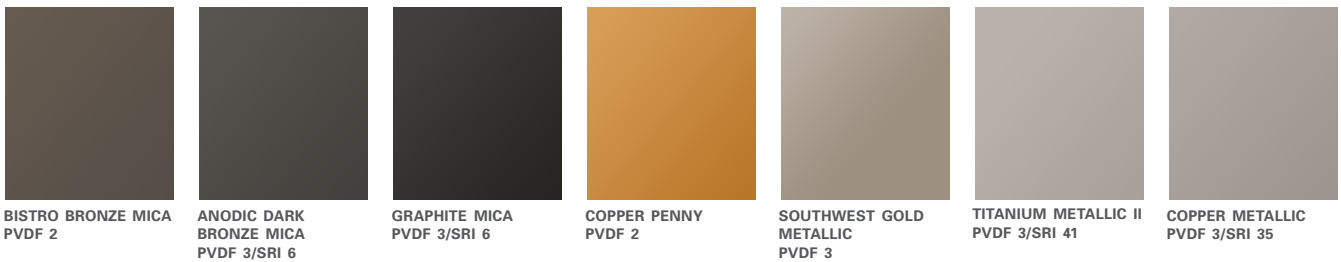
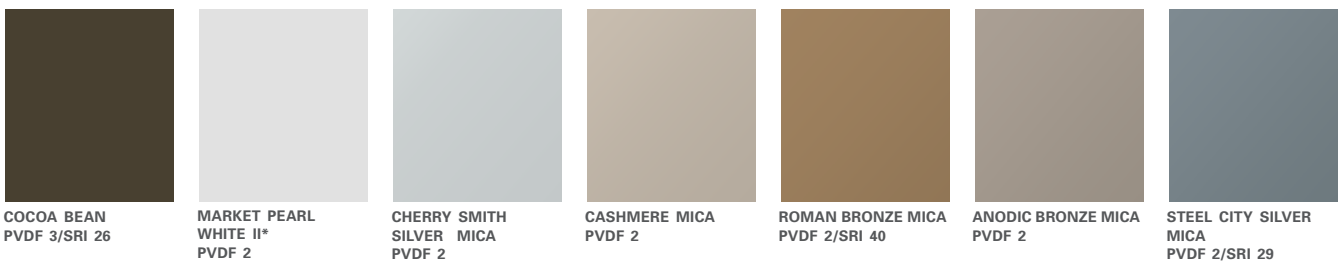


### Inspirational

This selection of **custom** colors represents colors and finishes designed to inspire creativity. These finishes are not stocked inventory items, therefore lead times, custom color fees, and minimum order quantities apply. Don't see what you're looking for? Contact your ALUCOBOND® Sales Representative to discuss additional custom color options.

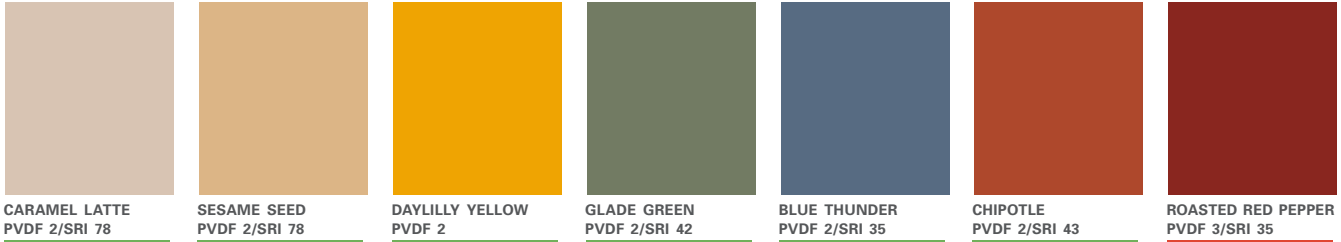

### Spectra

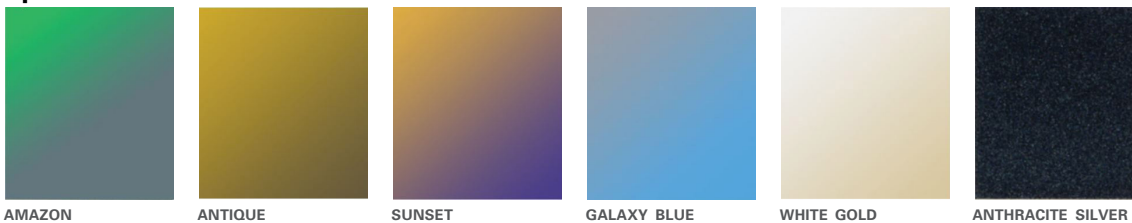

\* Previously named Market White Mica

**PVDF** or **Polyvinylidene Fluoride Finish** systems are the industry standard for metal architectural coatings. The **SRI** or **Solar Reflectance Index** with cool paint technology is a measure of a finish's ability to reject solar heat, as shown by a small temperature rise. It is defined so that a standard black (reflectance 0.05, emittance 0.90) is zero and a standard white (reflectance 0.80, emittance 0.90) is 100. SRI values are subject to change based on paint supplier and availability. **Please contact Customer Service for the most accurate listings as well as stocking of Spectra colors.**

## FINISH SYSTEMS

ALUCOBOND® Cool Systems are created utilizing a color and an **Inspirational** PVDF (Polyvinylidene Fluoride) finish system. When requesting a color, we will provide you with the resin type, the number of coats, the color name and the gloss level. **ALUCOBOND® Spectra** colors use high-quality fluorocarbon paint systems applied in a continuous coil-coated process to create a color-shifting surface. Depending on the pigment type and viewing angle, different wave-lengths of light are reflected, resulting in an ever-changing color gradient with iridescent highlights. Now your entryways, columns, and facades can make a bold statement without upsetting your budget.

## WARRANTIES

For warranty information please contact your ALUCOBOND® representative.

## PHYSICAL PROPERTIES

### ALUCOBOND® Composition

- › Aluminum interior and exterior facings in 0.020" nominal thickness to ensure flatness
- › Proprietary fire-retardant (Plus) core available in 4mm nominal thickness only

### Sheet Widths

- › Standard coil coated widths include 50" and 62"
- › Standard anodized widths include 62"
- › Custom width 40"

### Sheet Lengths

- › Standard lengths include 146" and 196"
- › Custom lengths for coil coating up to a maximum of 360"
- › Custom lengths for anodized up to a maximum of 216"

### Minimum Bending Radius

- › The minimum bending radius of ALUCOBOND® Plus without routing the interior skin is 15 times the thickness of the material

### Available Finishes

- › PVDF, FEVE
- › Polyester
- › HDP
- › Anodized: Clear, Light Bronze, Medium Bronze, Dark Bronze and Black
- › Monochromatics, Micas and Metallics
- › naturAL
- › Spectra

## TECHNICAL DATA

	ALUCOBOND® Plus
Thickness	4mm
Nominal Weight (lbs/sq.ft)	1.56
Coefficient of Expansion x10 <sup>-5</sup> (in./in.°F)	1.11
Temperature Resistance	-55° to 175° F (-48° to 80°C)
Minimum Peel Strength	115 N mm/mm

### Tests and Building Codes

Guided by the most comprehensive technical support team in the industry, ALUCOBOND® maintains constant and rigorous code compliance. From conceptual vision to finished project, the ALUCOBOND® sales and service professionals will guide you through the process.

### North American Building Code Acceptance

- › ALUCOBOND® Plus is accepted by many code regulatory bodies including:
  - › IBC
  - › Miami-Dade County, Florida
  - › National Building Code of Canada
  - › State of Florida
  - › City of Los Angeles, California

### Alucobond Code Tests

- › ALUCOBOND® has been tested in accordance with the following standards:
  - › ASTM E 84 – Surface burning characteristics
  - › ASTM D1929 – Ignition properties
  - › ASTM D1781 – Peel strength
  - › NFPA 285 – Intermediate scale multi-story (ALUCOBOND® Plus only)
  - › CAN/ULC-S134 (ALUCOBOND® Plus only)

## CUSTOM COLOR

Don't see what you are looking for? Let your imagination be our guide! The palette of coil-coated colors can be endless. Our color matching experts will work to match your color. Custom colors are available but require a 1,000 sqft. minimum order and are subject to set-up charges. Exact matches are sometimes not possible. Matching a color created by a spray method, particularly a metallic, may not match with a color created on a roll coated method.

To ensure that we identify your color correctly, we require either:

A hand sample of at least 1" x 1", **or** a Pantone® color reference, which can be noted as a number with a "C" for coated or "U" for uncoated.

Example: Pantone 220C, **or** a PPG paint code reference.

Send the color sample to:

**ALUCOBOND® Custom Color Match Department**  
**208 West Fifth Street**  
**Benton, KY 42025**

Please provide your name, company name, address, phone number and email address, as well as the project name, project location, type of finish and gloss. We will update the progress of your custom color request via email.

800.626.3365  
[www.alucobondusa.com](http://www.alucobondusa.com)